



Instore POS tablet

Tablet for enterprise

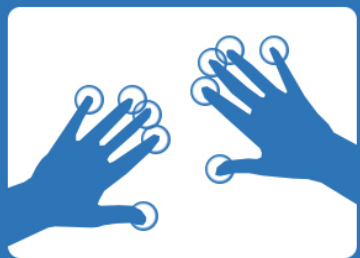

10 point
capacitive touch

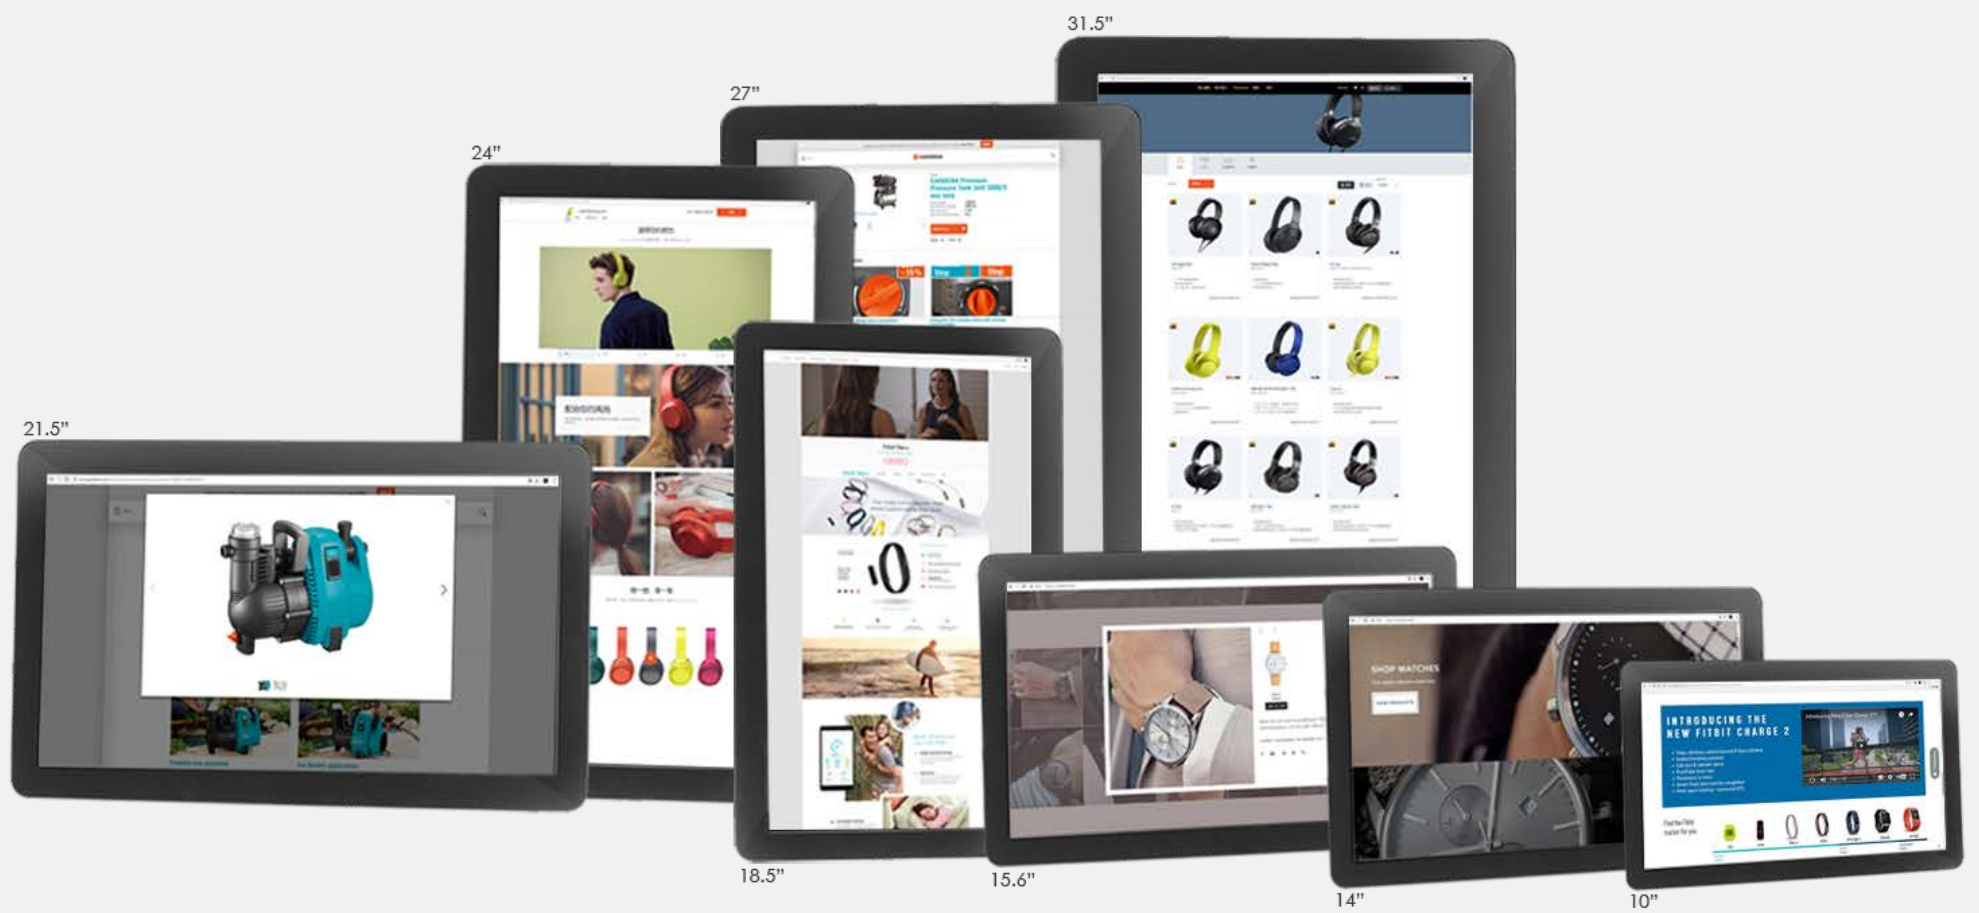

STAROS
- kiosk lockdown app included

Starcontrol

STAR CONTROL
- remotely manager tablets



Commercial grade

Product overview

Glory Star Instore POS Tablets are designed for brands and retail shops to display interactive contents. STAROS the kiosk lockdown app is included in the tablet where it securely locks down the tablet from third party access, and with STARCONTROL, you can remotely manage the status of the tablets.

Available in 10", 14", 15.6", 18.5", 21.5", 23.8", 27", 31.5" widescreen with selectable high-performance CPUs and Full-HD IPS capacitive touchscreens

Choice of Wi-Fi / Ethernet

Optimize deployments with cloud-based configuration, monitoring and scheduling

Modern design with flexible mounting in portrait, landscape and table-top orientation

Instore POS tablet

Specification		JAR101	JAR141	JAR156	JAR185	JAR215	JAR238	JAR271	JAR321	
Screen size		10"	14 "	15.6"	18.5"	21.5"	23.8"	27"	32"	
Panel info.	Resolution	1280x800	1920x1080	1920x1080	1366x768	1920x1080	1920x1080	1920x1080	1280x800	
	Brightness	350 cd/m2	250 cd/m2	220 cd/m2	200 cd/m2	220 cd/m2	250 cd/m2	250 cd/m2	280 cd/m2	
	Contrast	800:1	700:1	800:1	1000:1	1000:1	1000:1	1000:1	1200:1	
	Aspect Ratio	16:10			16:9					
	Active Display Area	134.8x216.2	165.4x294.3	192.8x343.6	228.0x407.7	266.6x475.5	294.4x522	337.1x598.6	393.8x699.4	
	Viewing angle	H170° / V170°	H178° / V178°			H170° / V170°	H178° / V178°	H170° / V 170°	H178° / V178°	
	Touch Tech.	5point cap touch	10 point cap touch (reflective glass)							
Hardware & OS	CPU	RK3128 ARM A17, Quad core 1.8 GHz	RK3288 ARM A17, Quad core 1.8 GHz							
	RAM	1GB DDR	2GB DDR							
	ROM	8GB eMMC Flash								
	OS	Android 5.1								
Video/ Image	Video format	H.265, VP8, RV, WMV, AVS, H.263, MPEG4, Up to 4K x 2K decoding, HTML5, Flash 10								
	Audio format	MP3/ WMA/ AAC etc.								
	Image format	JPEG, BMP, PNG								
Audio	Speaker	2x1W	2x1.5W	2x1.5W	2x1.5W	2x1.5W	2x1.5W	2x1.5W	2x1..5W	
Communication	Bluetooth	EDR 4.0								
	Wi-Fi	802.11 b/g/n								
	Ethernet	10/100 LAN								
General information	Color	Black								
	I/O	RJ45 x 1;USB x 3; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1								
	Included in Box	Instore POS series tablet, Power Adaptor, Power cable								
	Sensors	G-sensor								
	Power input	12V 2A	12V 3A	12V 3A	12V 3A	12V 3A	12V 3A	12V 3A	12V 3A	
	Operating Environment	Operating: 32°F to 104°F (0°C to 40°C); Storage: -4°F to 122°F (-20°C to 50°C) Operating: 20%-80%; Storage: 10%-95%								
	Certification	CE, FCC, ROHS								
	Language	Multi language								
	VESA	VESA 75			VESA 75/100					
Dimension	Dimension (L x W x H)	250 × 28 × 172 mm	355 × 32.6 × 228 mm	403.76 × 33.5 × 252.76 mm	462 × 37.5 × 282.5 mm	539.11 × 39.75 × 332.21 mm	595.5 × 43.6 × 363.1 mm	662.73 × 60.53 × 400 mm	763.77 × 72.52 × 457.21 mm	
	Weight	660g	1120g	1433g	2563g	3538g	4800g	5300g	8000g	
	Box size/each PCs (L x W x H)	385 x 65 x 222 mm	435 x 96 x 320 mm	486 x 97 x 351 mm	542 x 102 x 375 mm	618x115 X434 mm	655x115 x455mm	725x115 x490mm	842x115 x575mm	
	Master Box size (L x W x H)	470x400 x355 mm	443x396 x374 mm	494x300 x388 mm	550x318 x414 mm	622x313 x468 mm	670x250 x480mm	740x250 x515mm	864x258 x611cm	
	Master Box weight	13.7Kg	8.76Kg	7.93Kg	11.82 Kg	15.58 Kg	14.2Kg	15.6Kg	21.8Kg	
	Pieces/Carton	10 PCS	4 PCS	3 PCS	3 PCS	3 PCS	2PCS	2PCS	2PCS	

*see dimensional drawings for details

STAROS Features

STAROS	<ul style="list-style-type: none"> • Kiosk lockdown • Set timer to turn device on and off 	<ul style="list-style-type: none"> • App Lockdown • Hide control buttons
STAR CONTROL	<ul style="list-style-type: none"> • Manage device remotely • Upload video to device 	<ul style="list-style-type: none"> • Control power on/off • Manage apps remotely

To find out more about our extensive range of Glorystar solutions, go to www.glorystargroup.com , or call the office nearest you.

For more information, please contact us at sales@glorystargroup.com

Glorystar reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Glorystar, the Glorystar logo, STAR CONTROL and STAROS are either trademarks or registered trademarks of Glorystar Group Limited. All other trademarks are the property of their respective owners.